



## Feature Rich, High Performance VMS DVTel's Entry Level, Single Server Solution

DVTel's Solus Video Management System (VMS) is an open standards, networked-based, turnkey, software and hardware system that uses the latest technology advancements to create the most user-friendly solution on the market today.

One complete package replaces the antiquated CCTV matrix switch, multiplexer, and DVR/NVR and gives you the power of a cutting-edge IP-based physical security solution.

The Solus Appliance VMS comes in 8, 16, 24 and 32 configurations, works with the most popular brands of IP cameras and encoders and is ONVIF compliant. With Solus VMS you have the ease of use of plug-and-play system, but you are not locked into proprietary hardware.

Solus gives you all the tools you need to view, capture, record, analyze, and store high quality video and audio. Anytime, anywhere.

Digital to its core, Solus VMS can be either digital or analog at the edge. You can view live and recorded images on a PC monitor or, using a decoder, on an analog CCTV monitor. You control camera selection and PTZ camera operation from a PC keyboard and mouse or from a traditional CCTV keyboard. The system accepts IP networked cameras or, using encoders, any traditional analog cameras. Whether the data is analog or digital, the Solus VMS engine is 100% digital.

With four packages available, it is easy to find the solution that best fits the needs of the small to mid-sized user.

- **Robust**
- **Bundled rack mount server solution includes 5 user connections, 2 keyboard connections and 8/16/24/32 channel connection licenses**
- **Supports multiple video compressions including H.264, MPEG4, and MJPEG**
- **Greater flexibility in viewing, recording, and exporting audio and video**
- **Integrates with existing legacy CCTV equipment and hundreds of third party IP cameras and encoders**
- **Provides multi-level user access rights**
- **Interactive System Administration Dashboard**



***DVTel delivers peace-of-mind in a stand-alone solution with Solus VMS V6.1, backed by years of experience in network based solutions.***

# Solus Appliance VMS V6.1

## Integrated Server VMS Solution

### System Features and Functionality

#### Live Video Monitoring

- Cameras can be monitored using computer monitors displaying the ControlCenter client application and analog monitors connected to the network via hardware decoders.
- State-of-the-art On Screen Display applet is used for maximizing the video real estate
- Multiple tile layout patterns: 4:3 and 16:9 aspect ratios for ControlCenter use
- Camera switching using a client PC mouse, PC keyboard or CCTV keyboard
- Camera sequences
- Supports remote viewing over the internet using the Gateway and Transcoder services

#### Live Audio Monitoring

- Audio inputs, such as microphones, can be monitored using computer speakers on the ControlCenter client workstation. They can also be monitored using audio outputs, such as speakers, connected to the network via audio hardware decoders
- Audio inputs can be linked to video cameras for combined audio-video monitoring or be monitored independently
- Volume, mute and other audio controls

#### Recording

- Record video from any supported camera or edge device in any resolution and profile
- Record independent or video linked audio inputs
- Support for multiple recording triggers: manual, schedule, alarm-based, motion based and event-based. These recording reasons are saved as part of the clips' metadata
- Dynamically change record settings based on motion, alarm, or other events
- Support for pre and post alarm and pre and post event recording
- Control the recording retention time – how long clips remain archived before being overwritten—per camera and per type of recording trigger
- Lock clips that should be kept indefinitely
- Recording profiles and schedules can be set individually per stream (audio or video)

#### Playback from Archive

- Support for multiple concurrent video and audio playback
- Support for Synchronized playback of multiple concurrent video and audio clips
- Archives can be queried based on scenes; date and time; recording reasons/triggers; bookmarks and incidents; motion smart search and other motion search methods
- Increase or decrease playback speed and use reverse playback to examine clips from end to start. Support for frame by frame playback
- The ControlCenter timeline provides a visual indication of the current frame's time and position, the playback speed and metadata such as recording triggers and bookmarks
- The ControlCenter timeline provides video and audio clip navigation capabilities such as jump-to-time, change of speed and direction, change of timeline resolution and more

#### Export

- Video and audio can be exported to a DVTEL proprietary file format, providing an encryption protected SHA-1 digital signature for evidence management purposes
- Video can be exported to an AVI file using industry-standard codecs, with or without audio
- Audio can be exported in a standard WAV format
- ControlCenter supports exporting clips for burning to a DVD with a copy of the stand alone DVTEL proprietary player
- Mass Export functionality optimized for high-speed export of massive amounts of data
- Background Export functionality provides a cost effective solution for long term retention of video and audio footage, allowing to configure automatic schedules for copying footage from the Archiver's primary storage to a secondary storage layer

#### Virtual Matrix

- Support PTZ user hierarchy to determine which users have priority over other users when controlling PTZ domes
- Camera switching from any keyboard or workstation to any viewing tile or analog monitor the system Sequences
- Salvos – available with Layouts in ControlCenter or groups of analog monitors
- Guard Tours (layout tours)
- Complete PTZ control, including control of presets, patterns, auxiliaries, PTZ lock
- CCTV keyboard support

#### Events and Actions

- Event logging within the audit trail database
- Support for automatic execution of actions in response to events.

# Solus Appliance VMS V6.1

## Integrated Server VMS Solution

### System Features and Functionality

#### Event Logging and Reporting

- Latitide automatically supports recording of many types of events into an AuditTrail database
- Support for user selectable event-type logging
- Recorded events include date, time and other relevant fields of information
- Reporting tool provides means for creating multiple types of reports, based on time criteria set by the user, and allows the user to view, print and export the reports
- Alarm history can be queried and displayed in ControlCenter

#### User Management

- Solus VMS supports user management capabilities, security authentication and privileges

#### Motion Detection

- Motion detection is supported in the following modes:
  - \* Full screen or zones on the Archiver, for all DVTel IP cameras and encoders
  - \* Edge based motion detection with zones for most of the 3rd party edge devices as well as DVTel cameras
- Motion Smart search, allowing the user to define a region of interest to query the system for all the motion incidents that have occurred in that region during a certain time period

#### Remote Connectivity


- Users can connect to multiple Solus systems from a single client application
- Thanks to the Gateway and Transcoder server, video can be viewed even over limited bandwidth connections, even when connecting through internet connections

#### Unified iomage analytics

- Inherent support for iomage analytics
- Receive Analytics events and alarms in ControlCenter
- View iomage analytic detections marked with OSD on the video
- Arm, disarm and clear events from iomage analytics device

#### Advanced Alarm Management

- Support for creation and configuration of an unlimited number of alarm types
- Alarms can be triggered automatically by the system in response to any event, according to the administrator's definitions
- Alarms can be triggered manually by users
- Alarms can be sent to multiple recipients, either simultaneously or based on pre-defined, alarm-type-specific recipient priorities
- ControlCenter displays an alarm list with detailed alarm states and history as well as various other alarm indications, including sound
- Situational awareness: using MapBuilder the user can generate maps with alarm icons that display the alarm status
- Alarm can be displayed with color coding to help operators quickly determine the level of urgency
- Alarms may display video and audio content to the user, including live and archived footage and maps. Alarms can also be associated with a pre-defined procedure URL page
- ControlCenter can display footage of multiple alarms concurrently in different tiles, in Block mode or Salvo mode
- Collaboration for operator groups: each operator can accept, forward, snooze or clear an alarm
- Alarms can trigger recording of pre-alarm and post-alarm periods, if defined
- Alarm recording is marked with automatic bookmarks
- Recorded alarm clips can be searched by recording reason or bookmark text

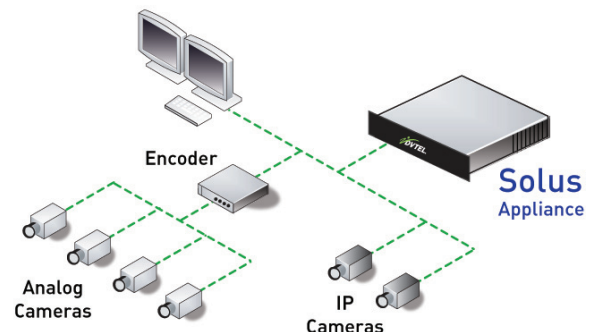

Typical Solus Appliance VMS Configuration

# Solus Appliance V6.1

## Integrated Server VMS Solution

### System Components

(\*ControlCenter clients should be installed on a separate machine)

#### Services

**Directory** – the system's central administration and configuration database

**EventDistributor (EDB)** – intelligent rule based switching of events and actions

**Archiver** – records video, audio and meta data and manages edge devices

**SafRun** – watchdog service

**Gateway and Transcoder** – for remote connectivity, usually over the internet or limited bandwidth connections

### Client Applications

(\*client applications should be installed on a separate machine)

**ControlCenter** – the operator command and control interface and a player for live, archived and exported multimedia and case management

**AdminCenter** – the system configuration interface

**QuickControl Center** - allows you to connect to your system with no installation required. Save the file to your desktop, or any other folder, and double click it to start operating your system, enjoying the ControlCenter full-fledged functionality. QuickControl Center is also a portable stand alone player

### VMS Solution Includes:

**Feature Rich Software** – Enterprise level features and functionality in an SMB package providing ease of installation, training, maintenance and usability

**Hardware** - Server and Storage Included (see specifications)

**Camera Connections** – 8, 16, 24, 32 channel systems

**User Connections** – 5 user connections included, not to exceed 10

**Keyboard Connections** – 2 keyboard connections included

**Documentation** – Solus VMS manuals and guides

**Reporting Tool** - included in base license

### Solus Appliance Specifications

(\*ControlCenter clients should be installed on a separate machine)

**Platform** – Rack Mount DVTEL USS 1U, powered by Dell

**Operating System** – Windows Server 2008 embedded, 64 bit

**CPU** - Quad-core Intel® Xeon® processor

**Memory** - 4GB RAM

**Database** – SQL Express 2008, included with the Solus VMS

**Storage**- RAID5 with Enterprise grade Hard Drives 2/3/4/6 TB for SOLUS-RMHW-8/16/24/32 respectively

**Onboard NIC and Sound Card**



### Ordering Information:

	Solus Appliance 8	Solus Appliance 16	Solus Appliance 24	Solus Appliance 32
Number of Channels	8	16	24	32
Option to add 8 SW channels (not to exceed 32)	+8	+8	+8	N/A
Storage Capacity	2TB	3TB	4TB	6TB
Part Number for Solus VMS V6.1	SOLUS-RMHW-8	SOLUS-RM-HW-16	SOLUS-RM-HW-24	SOLUS-RM-HW-32
Part Number for adding 8 SW channels	SOLUS-8-CAM	SOLUS-8-CAM	SOLUS-8-CAM	N/A
Part Number for User Pack (adds 5 licenses - not to exceed a total of 10 per system)	SOLUS-USR-UPG-5	SOLUS-USR-UPG-5	SOLUS-USR-UPG-5	SOLUS-USR-UPG-5
Part Number to upgrade Solus to Latitude NVMS V6.1 Classic (one required per 8 channels)	SOLUS-8STC-UPG	2 x SOLUS-8STC-UPG	3 x SOLUS-8STC-UPG	4 x SOLUS-8STC-UPG

Decoding options are available. Contact your Regional Sales Manager for details.